

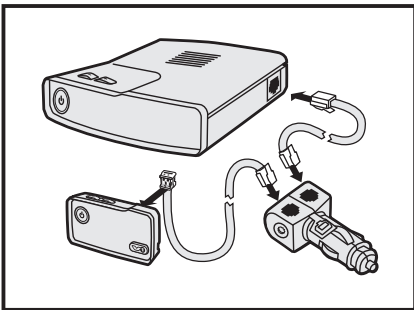


Controls and Functions

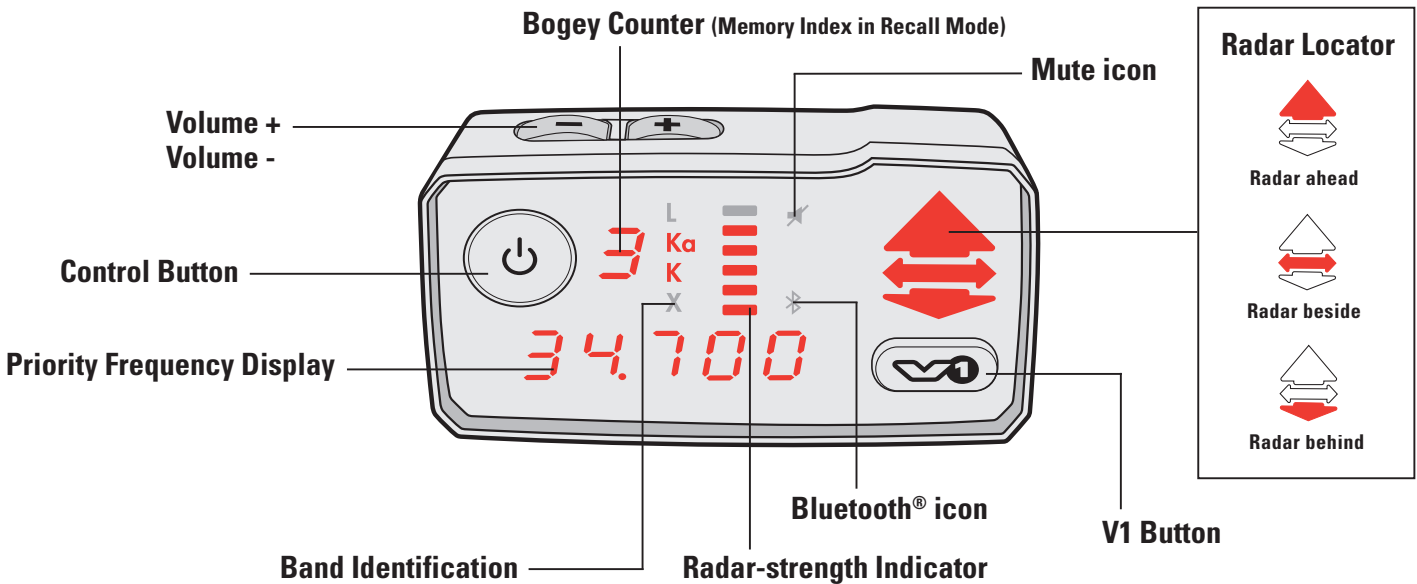

▶ How to connect

Connect V1 to "MAIN", Tech Display to "ACC".

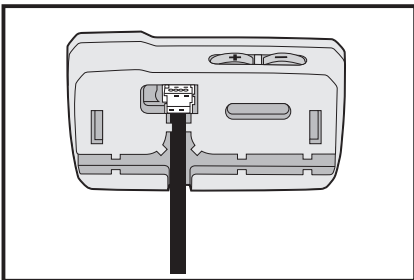

How to set muted volume

To set the sound level you will hear after muting, tap or to display the main volume in the Bogey Counter (0-9); the mute icon will be off. Tap the Control Button; the mute icon will turn on and the Bogey Counter will show muted volume (0-9). Press or until the muted volume reaches the desired level.

How to save an alert to memory

During an alert, press-and-hold V1 Button for 1.5 seconds.

How to recall an alert from memory

When no alert is present, tap the V1 Button. The most recent priority alert will be shown.

- To recall the first (newest) saved alert, tap .
- To recall the last (oldest) saved alert, tap twice. The Tech Display version will show after the first tap.

Control Button



- **Changing modes:** Press-and-hold repeatedly to step through the three available Analyzer Modes.
- **Muting:** Tap during an alert.

V1 Button

- Tap when no alert is active to activate Recall Mode.
- To save an active alert, press-and-hold 1.5 seconds.
- To cycle through display modes 1, 2, and 3, double-click to step through the following grid:

Display Mode	Detector Display	Tech Display
1 (default)	OFF	ON
2	ON	OFF
3	ON	ON

Recall Mode

- Tap V1 Button when no alert is active to activate Recall Mode.
- The most recent priority alert will be shown if it exists. Indicated by *P*.
- Tap the  or  to cycle through saved alerts. Alerts are numbered from 1 (most recent) to 9 (oldest).
- At the end of the saved alerts, the most recent priority alert and the Tech Display version will be shown.
- Continue tapping to go through the list again.

Volume +, Volume -

- Press-and-hold to raise or lower initial volume. Sound level 0-9 temporarily indicated in the Bogey Counter. A quick press on either button shows current volume setting.
- Changing the volume is not available on V1 Gen1.

Bogey Counter

Normal Operation

Blank - Power off
All others - Same as V1

Recall Mode

P - Priority Alert
T - Tech Display Version
123 etc. - Memory Index

Radar Locator




NOTE: In the case of multiple bogeys from different directions, an arrow will glow for each direction. The most urgent, or primary, threat will be indicated by a blinking arrow.

Frequency Display

Shows frequency of a current alert or a priority alert recalled from memory.

Frequencies that Matter

K Band

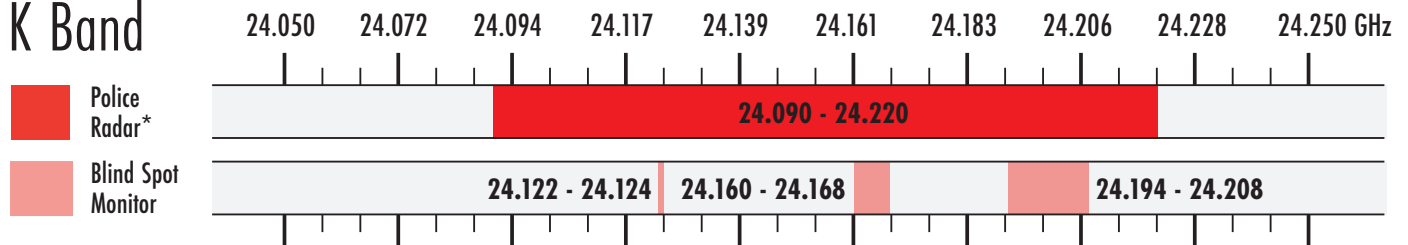

Ka Band



*As police radar guns age or lose calibration, their frequency may drift out of the expected ranges shown.

NOTE: To assure you're getting full functionality from the Tech Display, use **V1 Connection, the app** to make sure you have the latest firmware version for V1 Gen2.

WARNING: WATCHING THE SCREEN WHILE YOUR VEHICLE IS IN MOTION MAY BE DANGEROUS. DRIVE SAFELY AND OBEY ALL TRAFFIC LAWS.



Valentine Research

10280 Alliance Road
Cincinnati, OH 45242

(513) 984-8900
1- (800) 331-3030

www.valentine1.com

©2024 TD-QSG2