Controls and Functions

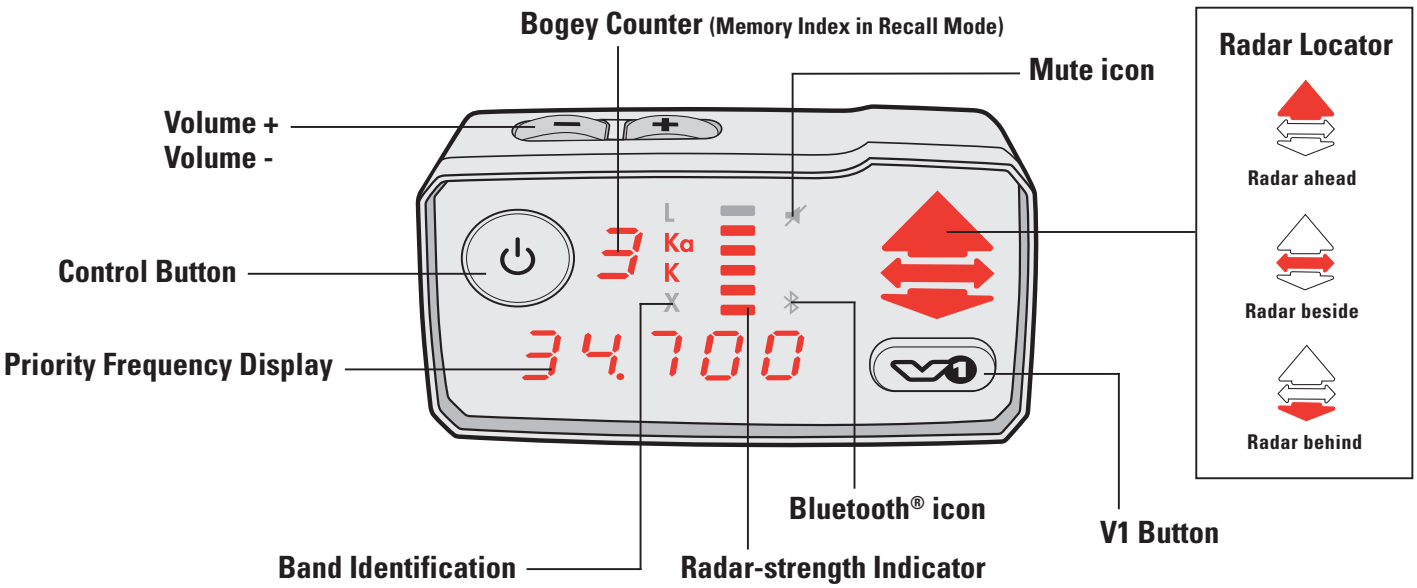

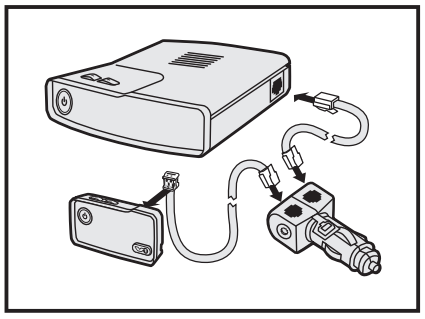

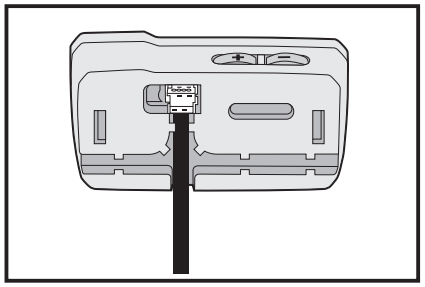

How to connect

Connect V1 to "MAIN", Tech Display to "ACC".

How to set muted volume

To set the sound level you will hear after muting, tap ⊕ or ⊖ to display the main volume in the Bogey Counter (0-9); the mute icon will be off. Tap the Control Button; the mute icon will turn on and the Bogey Counter will show muted volume (0-9). Press ⊕ or ⊖ until the muted volume reaches the desired level.

How to save an alert to memory

During an alert, press-and-hold V1 Button for 1.5 seconds.

How to recall an alert from memory

When no alert is present, tap the V1 Button. The most recent priority alert will be shown.

- To recall the first (newest) saved alert, tap ⊖.
- To recall the last (oldest) saved alert, tap ⊕ twice. The Tech Display version will show after the first tap.

Control Button

- **Changing modes:** Press-and-hold repeatedly to step through the three available Analyzer Modes.
- **Muting:** Tap during an alert.

V1 Button

- Tap when no alert is active to activate Recall Mode.
- To save an active alert, press-and-hold 1.5 seconds.
- To cycle through display modes 1, 2, and 3, double- click to step through the following grid:

Display Mode	Detector Display	Tech Display
1 (default)	OFF	ON
2	ON	OFF
3	ON	ON

Recall Mode

- Tap V1 Button when no alert is active to activate Recall Mode.
- The most recent priority alert will be shown if it exists. Indicated by P-r-1.
- Tap the ⊖ or ⊕ to cycle through saved alerts. Alerts are numbered from 1 (most recent) to 9 (oldest).
- At the end of the saved alerts, the most recent priority alert and the Tech Display version will be shown.
- Continue tapping to go through the list again.

Volume +, Volume -

- Press-and-hold to raise or lower initial volume. Sound level 0-9 temporarily indicated in the Bogey Counter. A quick press on either button shows current volume setting.
- Changing the volume is not available on V1 Gen1.

Bogey Counter

Normal Operation

Blank - Power off
All others - Same as V1

Recall Mode

P-r-1 - Priority Alert
t - Tech Display Version
123 etc. - Memory Index

Radar Locator

NOTE: In the case of multiple bogeys from different directions, an arrow will glow for each direction. The most urgent or priority threat will be indicated by a blinking arrow.

Frequency Display

Shows frequency of a current alert or a priority alert recalled from memory.

Frequencies that Matter

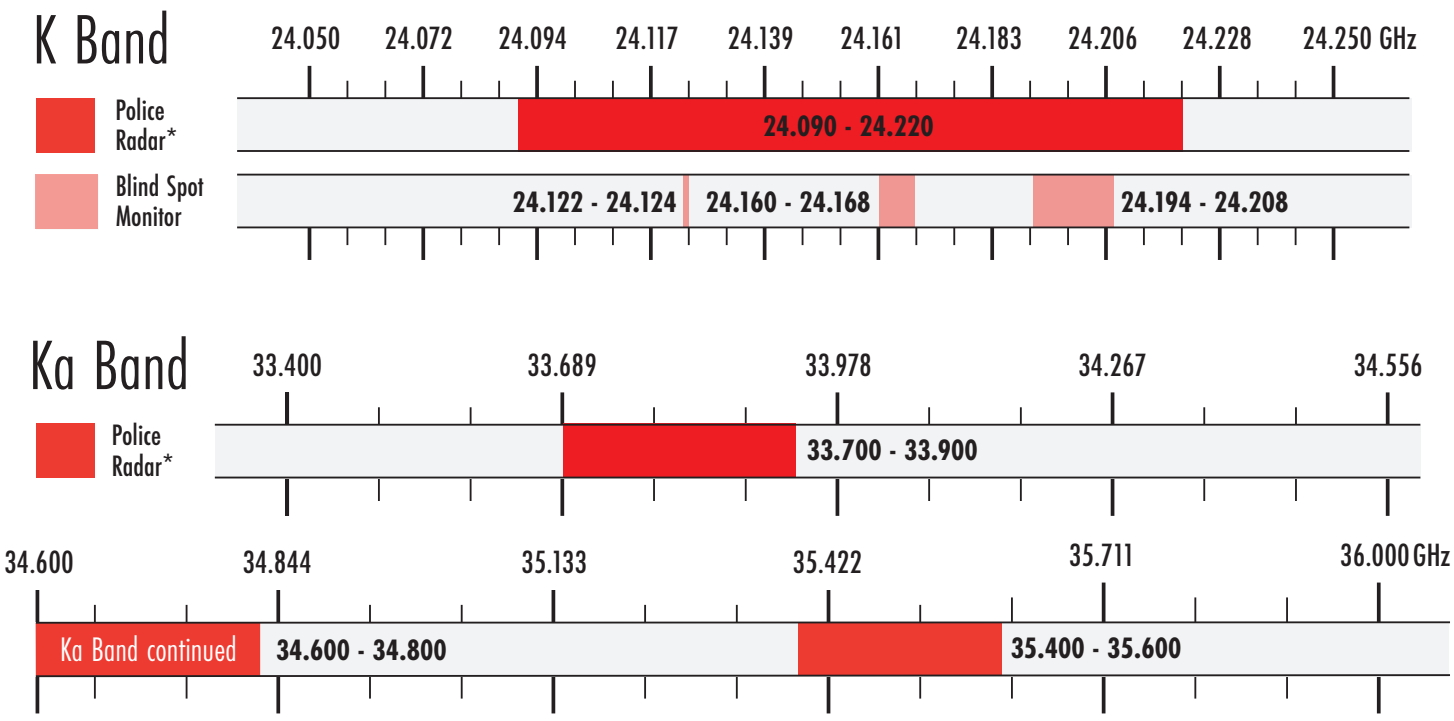

*As police radar guns age or lose calibration, their frequency may drift out of the expected ranges shown.

NOTE: To assure you're getting full functionality from the Tech Display, use ***V1 Connection, the app*** to make sure you have the latest firmware version for V1 Gen2®.

WARNING: WATCHING THE SCREEN WHILE YOUR VEHICLE IS IN MOTION MAY BE DANGEROUS. DRIVE SAFELY AND OBEY ALL TRAFFIC LAWS.

Valentine Research

10280 Alliance Road
Cincinnati, OH 45242

(513) 984-8900
1- (800) 331-3030

www.valentine1.com

©2026 TD-QSG4